

JESSI D'S GARAGE


NC VENT TRIM INSTALL

TOOLS
PHILLIPS + SMALL
FLATHEAD
TRIM TOOLS OPTIONAL



1 REMOVE DASH TRIM

Carefully remove the dashboard trim to access the vent. Use trim tools or pull gently.

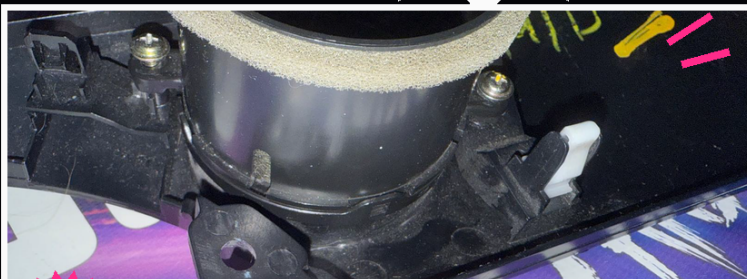

2 REMOVE VENT HOLDER

Remove the **TWO** factory screws, then carefully slide the vent assembly out.



3 SEPARATE THE HALVES

Find the small clips around the edge. Use a flathead to release them one at a time.



4 FIT NEW VENT TRIM

Align the new front trim with the rear housing and press until **ALL** clips snap home.



5 REINSTALL & DONE!

INSTALL COMPLETE!

Reinsert the vent assembly. Secure it with the **ORIGINAL SCREWS**. Snap the dashboard trim back into place.



NEED A HAND?
SCAN FOR THE VIDEO GUIDE
JESSI D'S GARAGE